

D-584  
Brookview Bridge  
Brookview  
Public  
1931

Brookview Bridge, connecting the communities of Eldorado and Brookview, is a distinctive landmark in northeastern Dorchester County spanning the Northwest Fork of the Nanticoke. Replacing a 1903 wooden bridge that was located immediately south of the present structure, this pre-World War II, poured concrete span was designed and built by the J. E. Greiner Company of Baltimore; Harry D. Williar was chief engineer and W. C. Hopkins was the bridge engineer. The eight span poured concrete bridge featured originally a moveable bascule center lift of steel, however the bascule lift was immobilized in 1993 due to disuse. The distinctive bridge tender's house features a stream-lined design of Beaux-Arts neoclassicism with segmental arched window openings and a low pitched octagonal shaped roof. The two-lane roadbed is flanked by low neoclassical balustrades, which are supported underneath by a series of poured concrete brackets. The abutments on each side of the bascule lift span, as well as the shore built abutments at each end, are finished with a horizontal incised line rustication.

Prior to the two bridge spans across the Northwest Fork, the waterway was crossed by means of Crotcher's Ferry, which was established during the early eighteenth century by Samuel Crotcher. He had secured an agreement with Nanticoke Indian leaders Panquash and Amtokim for yearly rent of Upper Black Walnut landing. The annual payment to the native leaders was six bushels of Indian corn. The name Crotcher's Ferry remained in use throughout the eighteenth century and much of the nineteenth century.

# Maryland Historical Trust

## Maryland Inventory of Historic Properties Form

Inventory No. D-584

### 1. Name of Property (indicate preferred name)

historic Brookview Bridge  
other Crotcher's Ferry, Upper Black Walnut Landing

### 2. Location

street and number Maryland Route 14 not for publication  
city, town Brookview vicinity  
county Dorchester

### 3. Owner of Property (give names and mailing addresses of all owners)

name State of Maryland-Department of Transportation  
street and number telephone  
city, town Annapolis state MD zip code

### 4. Location of Legal Description

courthouse, registry of deeds, etc. Dorchester County Courthouse liber folio  
city, town Cambridge tax map tax parcel tax ID number

### 5. Primary Location of Additional Data

- ☐ Contributing Resource in National Register District  
☐ Contributing Resource in Local Historic District  
☐ Determined Eligible for the National Register/Maryland Register  
☐ Determined Ineligible for the National Register/Maryland Register  
☐ Recorded by HABS/HAER  
☐ Historic Structure Report or Research Report at MHT  
☐ Other: \_\_\_\_\_

### 6. Classification

Category	Ownership	Current Function	Resource Count
<input type="checkbox"/> district	<input checked="" type="checkbox"/> public	<input type="checkbox"/> agriculture	Contributing
<input checked="" type="checkbox"/> building(s)	<input type="checkbox"/> private	<input type="checkbox"/> landscape	Noncontributing
<input checked="" type="checkbox"/> structure	<input type="checkbox"/> both	<input type="checkbox"/> commerce/trade	1
<input type="checkbox"/> site		<input type="checkbox"/> defense	
<input type="checkbox"/> object		<input type="checkbox"/> domestic	
		<input type="checkbox"/> education	
		<input type="checkbox"/> funerary	1
		<input type="checkbox"/> government	
		<input type="checkbox"/> health care	
		<input type="checkbox"/> industry	
		<input type="checkbox"/> recreation/culture	
		<input type="checkbox"/> religion	
		<input type="checkbox"/> social	
		<input checked="" type="checkbox"/> transportation	
		<input type="checkbox"/> work in progress	
		<input type="checkbox"/> unknown	
		<input type="checkbox"/> vacant/not in use	
		<input type="checkbox"/> other:	
			Number of Contributing Resources previously listed in the Inventory

## 7. Description

Inventory No. D-584

### Condition

<input type="checkbox"/> excellent	<input type="checkbox"/> deteriorated
<input checked="" type="checkbox"/> good	<input type="checkbox"/> ruins
<input type="checkbox"/> fair	<input type="checkbox"/> altered

Prepare both a one paragraph summary and a comprehensive description of the resource and its various elements as it exists today.

The Brookview Bridge carries MD Route 14 across the Northwest Fork of the Nanticoke River, otherwise known as Marshyhope Creek, between Brookview on the south bank and Eldorado on the north bank in northeastern Dorchester County, Maryland. During the seventeenth, eighteenth, and nineteenth centuries the two communities were known jointly as Crotcher's Ferry, a name association that dates to the early settlement of Northwest Fork Hundred.

Built in 1931, the Brookview Bridge is a two-lane poured concrete span with a double leaf rolling lift bascule section flanked by eight individual spans on each side supported by square shaped piers on a reinforced concrete lintel. Each girder span is 35' in length supporting a wider roadbed with poured concrete bracket supports. The roadway is enclosed with a low reinforced concrete balustrade of square balusters and intermediate posts supporting a poured concrete cap. At each end of the bridge are reinforced abutments of poured concrete finished with scored concrete in a modified ashlar method of rustication to imitate the appearance of stone. The center bascule lift section is anchored by similarly finished reinforced concrete that flank the shipping channel. The bascule span is 60' long and surfaced with a concrete infilled steel grid,<sup>1</sup> and the sides rails are painted steel with square posts and stick style balusters. Defining the west side of the lift abutment is a reinforced concrete bridge tender's tower supported on poured concrete piers that support a second tier of square shaped, poured concrete legs under the enclosed bridge tender's office. The bridge tender's one-room office is finished in a neoclassical modernist aesthetic with diluted references to the Beaux-Arts style. The corners of the tender's house feature with raised concrete pilasters of smooth finish that flank segmental arched window openings on three sides. The fourth side facing the roadbed includes the entrance. The segmental arch is enhanced with a square edged concrete trim that repeats the segmental arched window opening. Fixed atop the segmental arched window openings is an eight-sided, low pitched tower roof covered in metal with a small antenna rising from the point.

<sup>1</sup> Alice Crampton and Julie Abdell, Maryland Inventory of Historic Properties form, D-584, December 1994.

## 8. Significance

Inventory No. D-584

Period	Areas of Significance	Check and justify below			
<input type="checkbox"/> 1600-1699	<input type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> health/medicine	<input type="checkbox"/> performing arts	
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> archeology	<input type="checkbox"/> education	<input type="checkbox"/> industry	<input type="checkbox"/> philosophy	
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> architecture	<input checked="" type="checkbox"/> engineering	<input type="checkbox"/> invention	<input type="checkbox"/> politics/government	
<input checked="" type="checkbox"/> 1900-1999	<input type="checkbox"/> art	<input type="checkbox"/> entertainment/	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion	
<input type="checkbox"/> 2000-	<input type="checkbox"/> commerce	<input type="checkbox"/> recreation	<input type="checkbox"/> law	<input type="checkbox"/> science	
	<input type="checkbox"/> communications	<input type="checkbox"/> ethnic heritage	<input type="checkbox"/> literature	<input type="checkbox"/> social history	
	<input type="checkbox"/> community planning	<input type="checkbox"/> exploration/	<input type="checkbox"/> maritime history	<input checked="" type="checkbox"/> transportation	
	<input type="checkbox"/> conservation	<input type="checkbox"/> settlement	<input type="checkbox"/> military	<input type="checkbox"/> other: _____	

Specific dates 1931

Architect/Builder J. E. Greiner Company

Construction dates

Chief Engineer, Harry D. Williar, W. C. Hopkins Bridge Engineer

Evaluation for:

☐ National Register

☐ Maryland Register

☒ not evaluated

Prepare a one-paragraph summary statement of significance addressing applicable criteria, followed by a narrative discussion of the history of the resource and its context. (For compliance projects, complete evaluation on a DOE Form – see manual.)

Brookview Bridge connecting the communities of Eldorado and Brookview is a distinctive landmark in northeastern Dorchester County crossing the Northwest Fork of the Nanticoke. Replacing a 1903 wooden bridge that was located immediately south of the present structure, this pre-World War II poured concrete span was designed and built by J. E. Greiner Company of Baltimore; Harry D. Williar was chief engineer and W. C. Hopkins was the bridge engineer.<sup>2</sup> The nine span bridge featured originally a moveable bascule center lift of steel, however the bascule lift was immobilized in 1993 due to disuse.<sup>3</sup> The distinctive bridge tender's house features a stream-lined design of Beaux-Arts neoclassicism with segmental arched window openings and a low pitched octagonal shaped roof. The roadbed is flanked by a low neoclassical balustrade, which is supported from below by a series of poured concrete brackets. The abutments on each side of the bascule lift span as well as the shore built abutments on each bank are finished with a horizontal incised line rustication.

Prior to the two bridge spans across the Northwest Fork, the waterway was crossed by means of Crotcher's Ferry, which was established during the early eighteenth century by Samuel Crotcher. He had an agreement with Nanticoke leaders Panquash and Amtokim for yearly rent of Upper Black Walnut landing. The annual payment to the native leaders was six bushels of Indian corn. The name Crotcher's Ferry remained in use throughout the eighteenth century and much of the nineteenth century.

Due to its distinctive character and relatively intact condition, the Brookview Bridge is eligible for listing on the National Register of Historic Places under Criteria C since the bridge embodies a distinctive architectural and engineering design characteristic of the early twentieth movement to improve road transportation and at the same time allow for an opening shipping channel on the Northwest Fork of the Nanticoke. As the highway system on the peninsula matured during the pre- and post World War II decades, the shipping channel was used less and less. Due to little call for raising the bascule lift span by the late twentieth century it was immobilized in 1993.<sup>4</sup>

<sup>2</sup> Alice Crampton and Julie Abdell, Maryland Inventory of Historic Properties form, D-584, December 1994.

<sup>3</sup> *Ibid.*

<sup>4</sup> *Ibid.*

## 9. Major Bibliographical References

Inventory No. D-584

Maryland Inventory of Historic Properties form, D-584, Alice Crampton and Julie Abdell, 13 December 1994.

## 10. Geographical Data

Acreage of surveyed property 1 acre  
Acreage of historical setting 1 acre  
Quadrangle name Rhodesdale, MD Quadrangle Quadrangle scale: 1:24,000

### Verbal boundary description and justification

The metes and bounds of this property are coincidental with the current boundary of the lot.

## 11. Form Prepared by


name/title	Paul B. Touart, Architectural Historian		
organization	Chesapeake Country Heritage & Preservation	date	3/28/2008
street & number	P. O. Box 5	telephone	410-651-1094
city or town	Westover	state	Maryland 21871

The Maryland Inventory of Historic Properties was officially created by an Act of the Maryland Legislature to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 supplement.

The survey and inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

return to: Maryland Historical Trust  
DHCD/DHCP  
100 Community Place  
Crownsville, MD 21032-2023  
410-514-7600



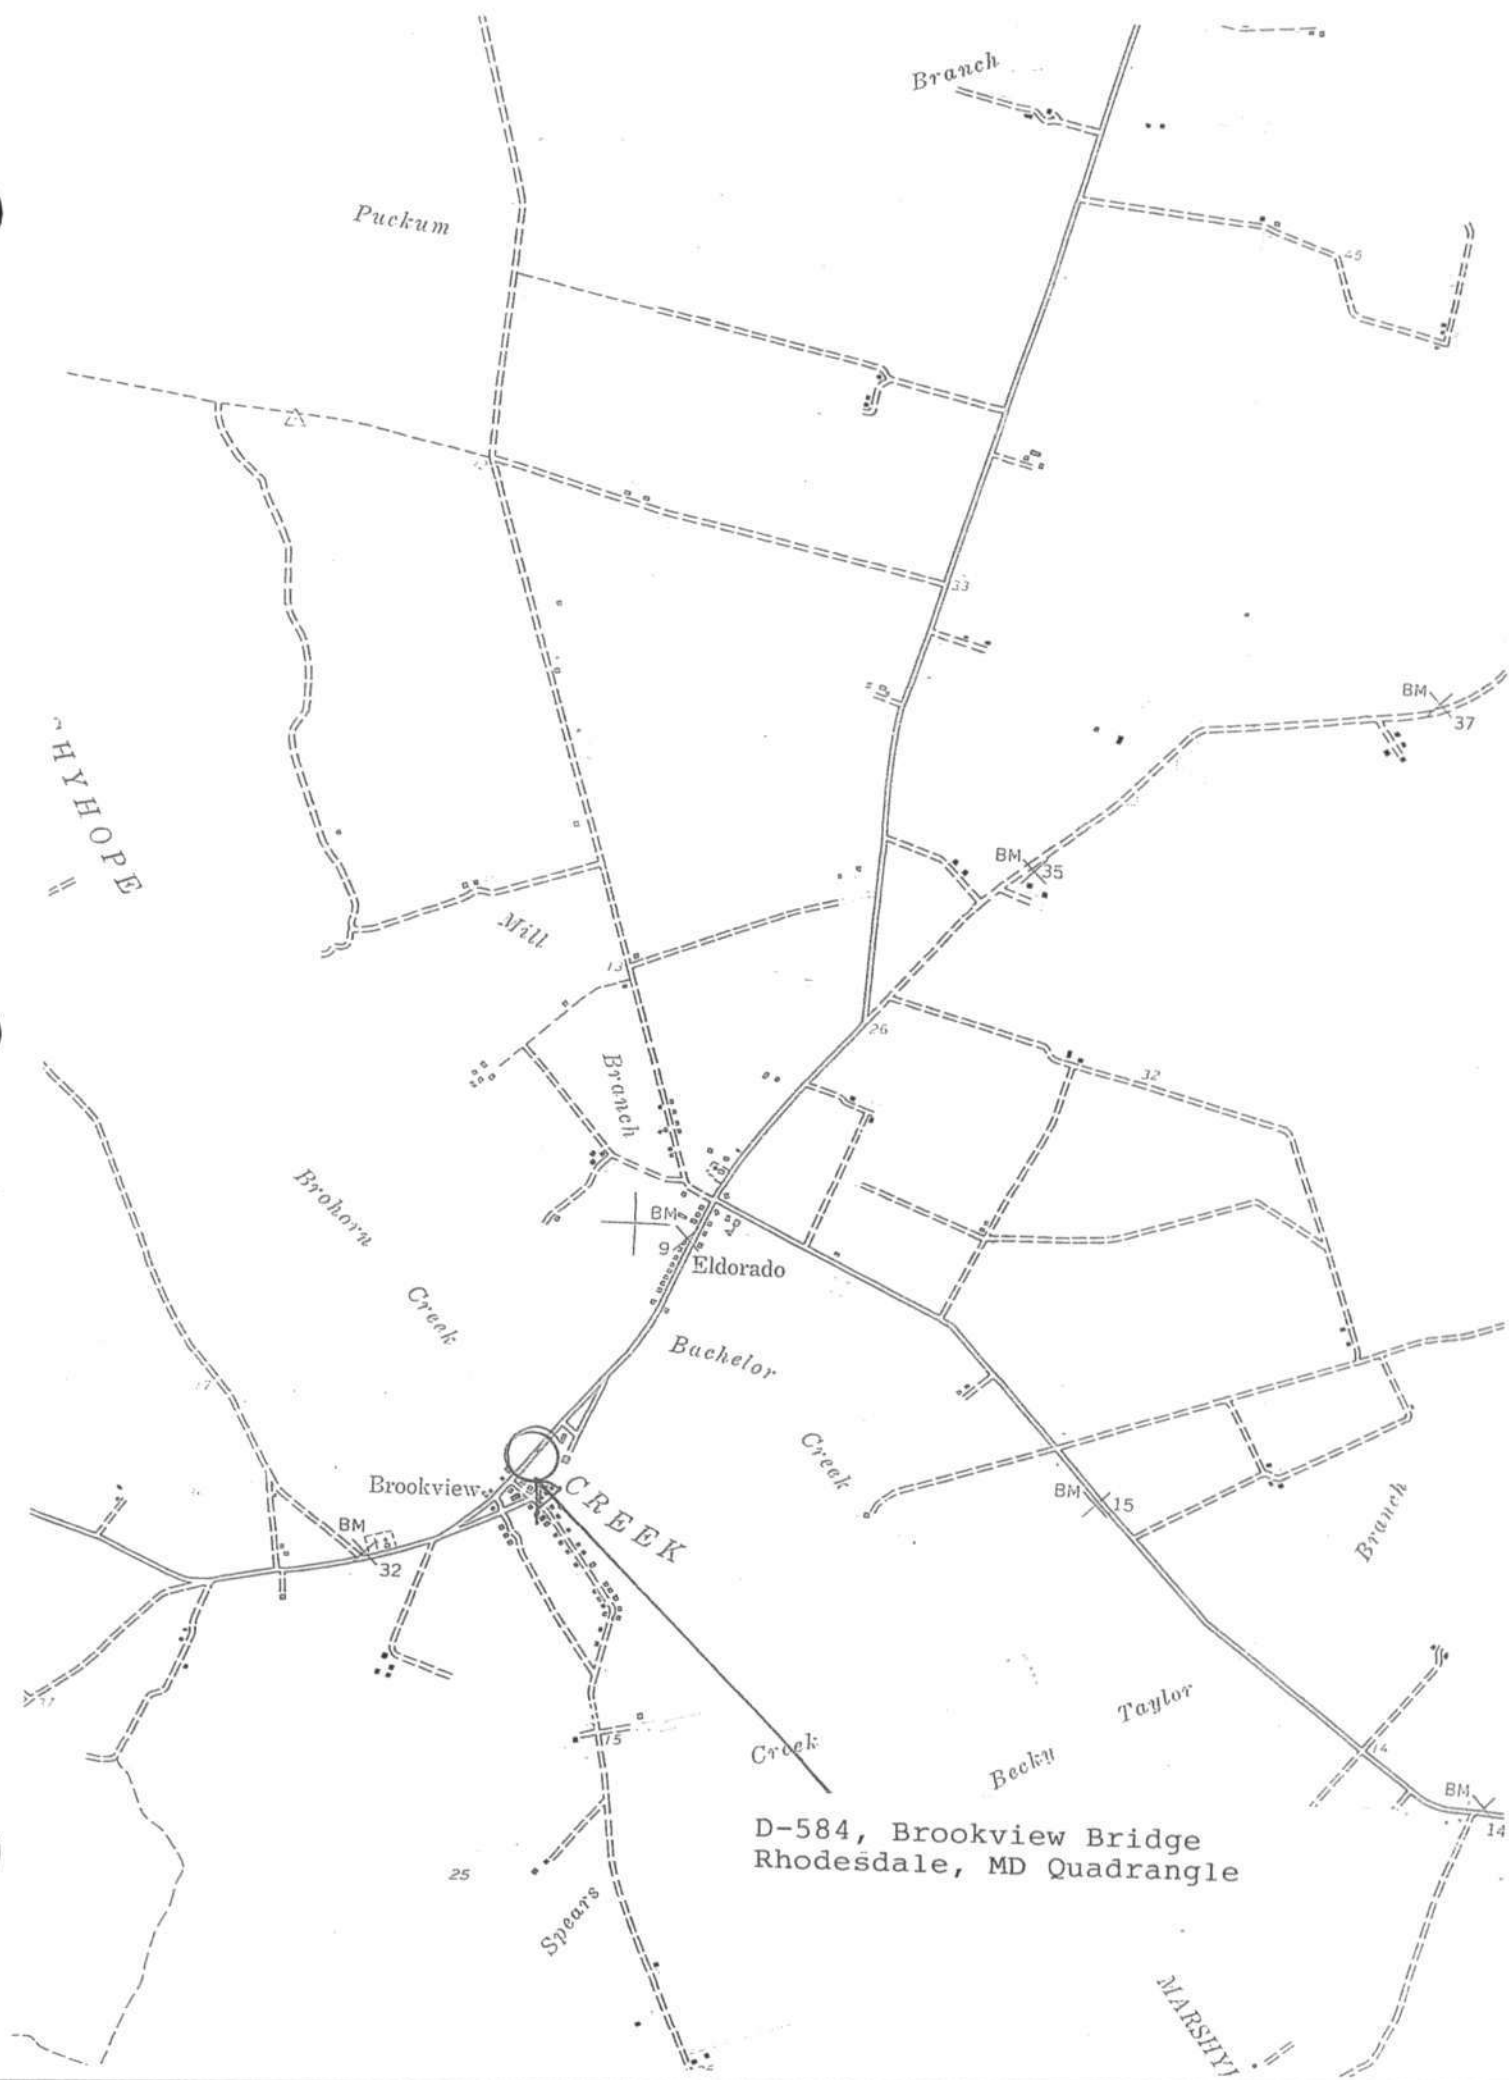

D-584, Brookview Bridge  
Rhodesdale, MD Quadrangle




D-584

BROOKVIEW BRIDGE

BROOKVIEW, DORCHESTER Co., MD.

SOUTHWEST ELEVATION OF BRIDGE  
TOWN'S TOWER & BRIDGE

1/2000, PAUL TOWNANT, PITOT & UNAPITED  
WEB / MD. HISTORICAL TRUST

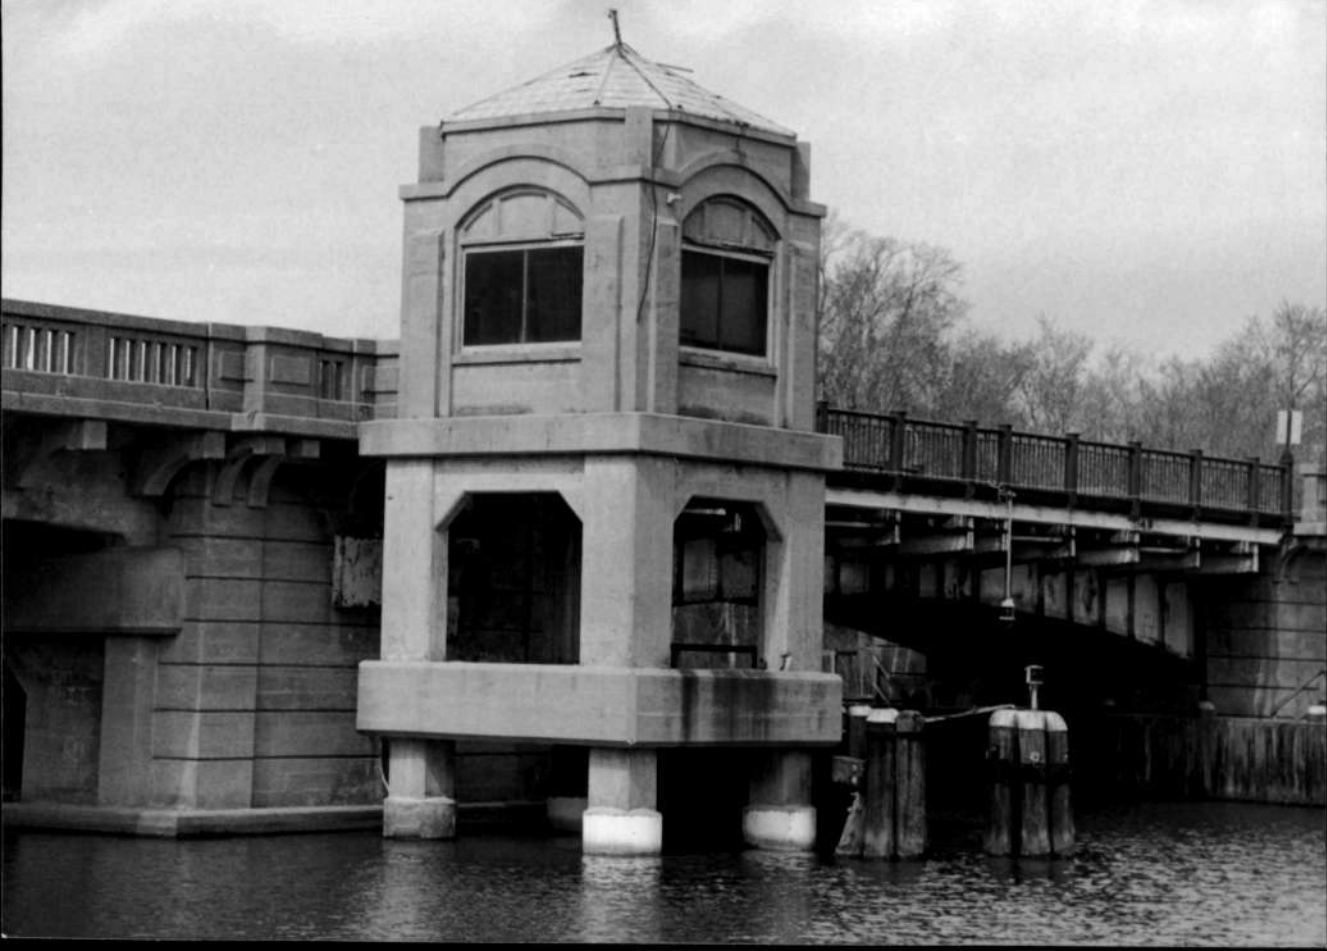

D-584

BROOKVIEW BRIDGE

BROOKVIEW, DORCHESTER Co., MD.

SOUTHWEST ELEVATION

1/08, PAUL TOWART, PHOTOGRAPHER

N&D / MD. HISTORICAL TRUST

**Maryland Historical Trust**

Maryland Inventory of Historic Properties Number: D-584

Name: MD 14 OVER MARSHYHOPE CREEK

The bridge referenced herein was inventoried by the Maryland State Highway Administration as part of the Historic Bridge Inventory, and SHA provided the Trust with eligibility determinations in February 2001. The Trust accepted the Historic Bridge Inventory on April 3, 2001. The bridged received the following determination of eligibly.

---

MARYLAND HISTORICAL TRUST

Eligibility Recommended   X   Eligibility Not Recommended           

Criteria:	A	B	C	D				
Considerations:	A	B	C	D	E	F	G	None

Comments: \_\_\_\_\_

Reviewer, OPS: Anne E. Bruder Date: 3 April 2001

Reviewer, NR Program: Peter E. Kurtze Date: 3 April 2001

June

Maryland Inventory of Historic Properties  
Historic Bridge Inventory  
Maryland State Highway Administration  
Maryland Historical Trust

MHT No. D-584Name and SHA No. Brookview Bridge (09001)Location:Street/Road Name and Number: MD 14 over Marshyhope CreekCity/Town: Brookview \_\_\_\_\_ vicinityCounty: Dorchester \_\_\_\_\_Ownership: ☒ State ☐ County ☐ Municipal ☐ OtherThis bridge projects over: ☐ Road ☐ Railway ☒ Water ☐ LandIs the bridge located within a designated district: ☐ yes ☒ no☐ NR listed district ☐ NR determined eligible district☐ locally designated ☐ other

Name of District \_\_\_\_\_

Bridge Type:☐ Timber Bridge☐ Beam Bridge ☐ Truss-Covered ☐ Trestle ☐ Timber-and-Concrete☐ Stone Arch☐ Metal Truss Bridge☒ Movable Bridge☐ Swing ☐ Bascule Single Leaf ☒ Bascule Multiple Leaf☐ Vertical Lift ☐ Retractable ☐ Pontoon☐ Metal Girder☐ Rolled Girder ☐ Rolled Girder Concrete Encased☐ Plate Girder ☐ Plate Girder Concrete Encased☐ Metal Suspension☐ Metal Arch☐ Metal Cantilever☐ Concrete☐ Concrete Arch ☐ Concrete Slab ☐ Concrete Beam ☐ Rigid Frame☐ Other Type Name \_\_\_\_\_

**Description:****Describe Setting:**

*The bridge at Brookview carries MD Route 14 over Marshyhope Creek in a northeast-southwest direction. It is located in a rural part of Dorchester County. The nearest building is the mid-twentieth century Evangelical Bible Church, southwest of the bridge.*

**Describe Superstructure and Substructure:**

*This structure is a two-lane movable bridge with a double leaf rolling lift bascule channel span with reinforced concrete T-beams and concrete encased steel stringers on the approach spans. A rolling lift bascule is one in which the center of rotation moves away from the opening as the span swings upward (Spero 1994:92). The eight concrete girder spans of Brookview Bridge are each 35 feet in length. The bascule span is 60 feet in length. The concrete girders are lined with concrete balustrades; the draw span has metal guard rails. The deck is reinforced concrete on the approach spans. Originally, the bascule span had a timber deck with a bituminous concrete wearing surface. In 1993, the timber deck on the bascule span was replaced with a concrete-filled steel grid and the bascule leaves were locked in the closed position.*

*The bridge tender's house is located in the southernmost corner of the draw span. It is a square plan building with foundations in the creek, with one room at the level of the roadway. The windows appear originally to have been segmentally arched with small panes. The arches have been filled in, and the replacement windows are double-paned sliding sash. Below the roadway level is an "open room," i.e., the segmental arched openings are unglazed. The general style of the house is Beaux-Arts.*

**Discuss major alterations:**

*The major alteration to this bridge occurred in 1993 when the original timber deck on the bascule span was replaced with a concrete-filled steel grid, and the bascule leaves were locked in a closed position. This alteration was done because the span had been raised so few times over the years (only about once a year), and in 1965, the Corps of Engineers, who govern the operation of movable bridges in the United States, granted the State permission to close the bridge to marine traffic on the condition that the operating machinery of the draw span be kept in working order.*

**History:**

**When Built:** 1931

**Why Built:** Replacement of existing bridge.

**Who Built:** State Roads Commission; Henry Adams, Inc., electric lighting contractor.

**Who Designed:** J. E. Greiner Company under the direction of Harry D. Williar, Chief Engineer and W. C. Hopkins, Bridge Engineer.

**Why Altered:** Lack of use has led to permanent closure of draw span.

**Was this bridge built as part of an organized bridge building campaign:**

*The 1920s and 1930s saw an active bridge-building program to replace narrow and unsafe bridges on the major highways of the Eastern Shore. Since the Good Roads Movement of the 1880s, Maryland citizens had been increasingly vocal in their demands for better roads. While the Eastern Shore had long relied on navigable waterways to transport goods to market, the decline of steamboat traffic and the rise of faster, more efficient vehicular traffic required action. With the growth in the number of automobiles and trucks early in the twentieth century, the need for better roads became particularly urgent. The program carried out in the 1920s and 1930s came in response to the shift from steamboats to trucks as the principal carriers of the region's agricultural and maritime produce to markets in Baltimore and beyond.*

**Surveyor Analysis:**

**This bridge may have NR significance for association with:**

☒ A Events    ☐ B Person

☒ C Engineering/Architectural Character

**Was the bridge constructed in response to significant events in Maryland or local history?**

*Rivers and streams provided the primary means of transportation on the Eastern Shore before the twentieth century. If bridges were built across navigable rivers, they had to be either high enough to allow ships clearance beneath the bridge or they had to be movable to allow navigation on the waterway. High, fixed bridges required extensive approach work and very high grades; hence, movable bridges became the primary technological method for spanning the Eastern Shore's navigable rivers (Spero 1994:85).*

*By the 1920s, however, vehicular traffic was taking precedence over steamboats as the primary carriers of the region's agricultural and maritime produce to market. The decline of steamboat transportation left the Eastern Shore isolated and its economy damaged. Highway transportation was faster, but it necessitated building better roads and replacing outmoded bridges. Brookview Bridge was one of a group of movable bridges constructed on the Eastern Shore in the 1920s and 1930s to meet this need.*

**When the bridge was built and/or given a major alteration, did it have a significant impact on the growth and development of the area?**

*While its precise influence on the growth and development of the local area is not known with certainty, it is presumed that a wider crossing at this point, with a capability to handle increased traffic loads and speeds, would have had a positive impact on the area and its economy by facilitating improved transport of goods and services.*

**Is the bridge located in an area which may be eligible for historic designation and would the bridge add to or detract from the historic and visual character of the possible district?**

*Brookview Bridge is located in a rural setting that may be significant for its rural historic landscape. If such is the case, the bridge would add to the visual character of the district because of its low elevation and the Beaux-Arts styling of the bridge tender's house.*

**Is the bridge a significant example of its type?**

*Brookview Bridge is significant under Criterion A for its role in the development of transportation on the Eastern Shore during the Modern Period, when vehicular traffic took precedence over steamboats to transport local agricultural and maritime products to markets in Baltimore and beyond.*

*It is significant under Criterion C as one of only 20 bascule bridges remaining in Maryland and one of even fewer rolling lift bascule bridges. While it is no longer a movable bridge, since its leaves have been locked in a closed position, the operating machinery has been kept in working order, and it could be altered again to regain its mobility, if such were needed. It is one of only two historic movable bridges remaining in Dorchester County.*

**Does the bridge retain integrity of the important elements described in the Context Addendum?**

*Brookview Bridge no longer retains integrity of its most characteristic feature, namely, its mobility, which was lost when the draw span was locked in place in 1993. Nevertheless, the bridge does retain its integrity of location, setting, design, feeling, and association. The overall Beaux-Arts design of the bridge tender's house remains despite the replacement of the windows.*

**Is the bridge a significant example of the work of the manufacturer, designer, and/or engineer and why?**

*Brookview Bridge is a significant example of the collaborative work of the J. E. Greiner Company and the State Roads Commission. The J. E. Greiner Company was established in 1908 by John Edwin Greiner, a prominent Baltimore engineer, who had previously designed railroad bridges for the Baltimore and Ohio Railroad. The Greiner company appears to have designed most of the movable bridges on the Eastern Shore. While the trend in the early decades of the twentieth century was toward standardized bridge design, particularly for those bridges constructed of concrete, movable bridges on the Eastern Shore designed by the Greiner Company were not standardized. Each bridge exhibits a different design and different decorative elements.*

**Should this bridge be given further study before significance analysis is made and why?**

*Further study of this bridge may determine whether the area in which the bridge is located is eligible for listing in the National Register as a rural historic landscape. Further study may also provide information on the effect of the bridge on the growth and development of that part of Dorchester County.*

Provide black and white prints and negatives and color slides of bridge, details, and setting labeled according to NR Bulletin 16A and Maryland Supplement to Bulletin 16A.  
Provide a photocopy USGS map illustrating the location of the bridge.

**Surveyor:**

**Name:** Alice Crampton/Julie Abell  
**Organization:** Parsons Engineering Science, Inc.  
**Address:** 10521 Rosehaven Street  
Fairfax, Virginia 22030-2899

**Date:** 12/13/94  
**Telephone:** (703) 591-7575

D-584  
Brookview Bridge  
Brookview vicinity  
public (unrestricted)

1931

*public*

This bridge carries Maryland Route 14 over Marshyhope Creek near Brookview, Maryland. It consists of eight concrete girder spans of 35 feet in length, with a double leaf bascule moveable span, measuring 60 feet in length, which carries the roadway over the channel of the creek. The concrete girders are lined by concrete balustrades, while the draw span has metal guard rails. A bridge keeper's house is located at the southernmost corner of the draw span. Built in the Beaux Arts style, the building is square in plan, with rooms above and below road level.

The Brookview Bridge was built in 1931 by the firm of Greiner and Company, Baltimore, Maryland. The firm of Henry Adams, Inc., also of Baltimore, served as electric lighting contractors.

As a moveable bridge, this structure is significant as a relatively rare kind of construct designed to accommodate both vehicular and water-borne traffic. This bridge is the only historic moveable bridge in Dorchester County on the state highway system, and one of 15 bridges of the same structural type throughout the entire state road network. It was identified by the Maryland Historical Trust for the Maryland Department of Transportation in a jointly conducted survey during 1980-81.

## INVENTORY FORM FOR STATE HISTORIC SITES SURVEY

**1 NAME**

HISTORIC

AND/OR COMMON

Brookview Bridge

**2 LOCATION**

STREET &amp; NUMBER

CITY, TOWN

VICINITY OF

CONGRESSIONAL DISTRICT

1st

STATE

Maryland

COUNTY

Dorchester

**3 CLASSIFICATION**

## CATEGORY

☐ DISTRICT  
☐ BUILDING(S)  
☒ STRUCTURE  
☐ SITE  
☐ OBJECT

## OWNERSHIP

☒ PUBLIC  
☐ PRIVATE  
☐ BOTH  
**PUBLIC ACQUISITION**  
☐ IN PROCESS  
☐ BEING CONSIDERED

## STATUS

☒ OCCUPIED  
☐ UNOCCUPIED  
☐ WORK IN PROGRESS  
**ACCESSIBLE**  
☐ YES: RESTRICTED  
☒ YES: UNRESTRICTED  
☐ NO

## PRESENT USE

☐ AGRICULTURE ☐ MUSEUM  
☐ COMMERCIAL ☐ PARK  
☐ EDUCATIONAL ☐ PRIVATE RESIDENCE  
☐ ENTERTAINMENT ☐ RELIGIOUS  
☐ GOVERNMENT ☐ SCIENTIFIC  
☐ INDUSTRIAL ☒ TRANSPORTATION  
☐ MILITARY ☐ OTHER

**4 OWNER OF PROPERTY**

NAME State Highway Administration DOT Survey

Telephone #:

STREET &amp; NUMBER

301 West Preston Street

CITY, TOWN

Baltimore

VICINITY OF

Maryland STATE 21201 zip code

**5 LOCATION OF LEGAL DESCRIPTION**

COURTHOUSE,  
REGISTRY OF DEEDS, ETC.

Liber #:

Folio #:

STREET &amp; NUMBER

CITY, TOWN

STATE

**6 REPRESENTATION IN EXISTING SURVEYS**

TITLE

DATE

☐ FEDERAL ☐ STATE ☐ COUNTY ☐ LOCAL

DEPOSITORY FOR  
SURVEY RECORDS

CITY, TOWN

STATE

Rhodesdale

**7 DESCRIPTION**

D-584

**CONDITION**

☐ EXCELLENT  
☒ GOOD  
☐ FAIR

☐ DETERIORATED  
☐ RUINS  
☐ UNEXPOSED

**CHECK ONE**

☒ UNALTERED  
☐ ALTERED

**CHECK ONE**

☒ ORIGINAL SITE  
☐ MOVED      DATE \_\_\_\_\_

---

DESCRIBE THE PRESENT AND ORIGINAL (IF KNOWN) PHYSICAL APPEARANCE

The bridge over Marshyhope Creek at Brookview carries Maryland Route 14 running NE-SW. It consists of eight concrete girder spans of 35' each, with a double leaf bascule moveable bridge in the channel of the creek, spanning 60'. The concrete girders are lined by concrete balustrades; the draw span has metal guard rails. The bridge keeper's house is located in the southernmost corner of the draw span. It is a square plan structure with foundations in the creek, with one room at the level of the roadway, with small pane segmental arched windows. Below this is an open room, i.e., the segmental arched openings are unglazed. The general style of the structure is beaux-arts.

CONTINUE ON SEPARATE SHEET IF NECESSARY

PERIOD		AREAS OF SIGNIFICANCE -- CHECK AND JUSTIFY BELOW			
<input type="checkbox"/> PREHISTORIC	<input type="checkbox"/> ARCHEOLOGY-PREHISTORIC	<input type="checkbox"/> COMMUNITY PLANNING	<input type="checkbox"/> LANDSCAPE ARCHITECTURE	<input type="checkbox"/> RELIGION	
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> ARCHEOLOGY-HISTORIC	<input type="checkbox"/> CONSERVATION	<input type="checkbox"/> LAW	<input type="checkbox"/> SCIENCE	
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> AGRICULTURE	<input type="checkbox"/> ECONOMICS	<input type="checkbox"/> LITERATURE	<input type="checkbox"/> SCULPTURE	
<input type="checkbox"/> 1600-1699	<input type="checkbox"/> ARCHITECTURE	<input type="checkbox"/> EDUCATION	<input type="checkbox"/> MILITARY	<input type="checkbox"/> SOCIAL/HUMANITARIAN	
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> ART	<input type="checkbox"/> ENGINEERING	<input type="checkbox"/> MUSIC	<input type="checkbox"/> THEATER	
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> COMMERCE	<input type="checkbox"/> EXPLORATION/SETTLEMENT	<input type="checkbox"/> PHILOSOPHY	<input type="checkbox"/> TRANSPORTATION	
<input checked="" type="checkbox"/> 1900-	<input type="checkbox"/> COMMUNICATIONS	<input type="checkbox"/> INDUSTRY	<input type="checkbox"/> POLITICS/GOVERNMENT	<input type="checkbox"/> OTHER (SPECIFY)	
		<input type="checkbox"/> INVENTION			

SPECIFIC DATES 1931

BUILDER/ARCHITECT

## STATEMENT OF SIGNIFICANCE

Greiner & Co., Baltimore, Md.  
Electric Lighting Contractors:  
Henry Adams, Inc., Consulting  
Engineer, Baltimore, Md.

The Brookview Bridge is significant at least for being a moveable bridge. (see general bridge significance, M/DOT Survey). It furthermore adds significantly the landscape in which it sits.

# 9 MAJOR BIBLIOGRAPHICAL REFERENCES

Files of the Bureau of Bridge Design, State Highway Administration,  
301 West Preston Street, Baltimore, Md. drawer 93.

Condit, Carl, American Building Art, 20th Century; New York, Oxford  
University Press, 1961.

CONTINUE ON SEPARATE SHEET IF NECESSARY

# 10 GEOGRAPHICAL DATA

ACREAGE OF NOMINATED PROPERTY \_\_\_\_\_

Quadrangle Name: Rhodesdale, MD

Quadrangle Scale: 1:24 000

UTM References:

18.430760.4269920

## VERBAL BOUNDARY DESCRIPTION

NA

LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES

STATE

COUNTY

NA

STATE

COUNTY

# 11 FORM PREPARED BY

NAME / TITLE

John Hnedak/M/DOT Survey Manager

ORGANIZATION

DATE

Maryland Historical Trust

1980

STREET & NUMBER

TELEPHONE

21 State Circle

(301) 269-2438

CITY OR TOWN

STATE

Annapolis

Maryland 21401

The Maryland Historic Sites Inventory was officially created  
by an Act of the Maryland Legislature, to be found in the  
Annotated Code of Maryland, Article 41, Section 181 KA,  
1974 Supplement.

The Survey and Inventory are being prepared for information  
and record purposes only and do not constitute any infringe-  
ment of individual property rights.

RETURN TO: Maryland Historical Trust  
The Shaw House, 21 State Circle  
Annapolis, Maryland 21401  
(301) 267-1438

MOVABLE SPAN BRIDGES OF MARYLAND

REPORT PREPARED BY:

RITA M. SUFFNESS

ARCHITECTURE AND BRIDGE HISTORIAN

LEADER, CULTURAL RESOURCES GROUP

MARYLAND STATE HIGHWAY ADMINISTRATION

BALTIMORE, MARYLAND

1992

Revised: January 19, 1995

## MOVABLE SPAN BRIDGES OF MARYLAND

### INTRODUCTION

Movable bridges have played an important part in the development of transportation in the United States. Engineers have always turned to this type when there was no other way of giving adequate vertical clearance for the passage of large vessels on a given waterway. The most widely recognized movable spans fall into three basic groups: the swing bridge, the bascule and the vertical lift. The movable bridge is understood to be as much as a product of mechanics as of engineering, as its distinguishing feature is the machinery necessary for the lifting or opening the span. Until 1890, when a satisfactory method of counterbalancing the great weight of a span had been found and the electric motor refined, neither the modern bascule nor the lift bridge could be developed.

### HISTORY OF MOVABLE SPAN BRIDGES

Movable spans are required for bridges crossing navigable waterways to permit passage of vessels that would otherwise be blocked by an insufficient vertical clearance of structures that are either fixed or in the closed position.

The history of movable bridges probably extends back into the ancient past. Bascules, commonly thought of as drawbridges, were used over the moats that surrounded castles during the Medieval era and the pontoon bridges of the Romans may have had portions that could be removed in order to permit the passage of vessels. Hand-powered bascules were first used for this purpose, but they were necessarily limited to very small openings. These ancient and medieval examples, along with the earlier modern types, were not counterweighted to any extent and their field of utility was quite limited.

Most movable bridges are railroad structures, most commonly found in flat terrain. Typically it would have been prohibitively costly to build the necessary long approaches in steeper terrains because of the need to attain a high-level crossing while at the same time maintaining a low enough gradient for trains to climb. Movable span bridges are common in cities and in other built-up areas where construction of an elaborate approach is usually out of the question.

After 1830, when the network of railroads and canal systems spread rapidly over the eastern United States, the demand for movable bridges grew at a comparable rate. Among the earliest were those built across Boston's Charles River. These were crude forms of timber trusses placed next to the river bank, hinged at one corner and swung open by a system of radiating stays that supported it when open. The channel afforded by this opening was very narrow, but it seemed to suffice for navigation, and, as additional

lines were needed after 1835, successive structures were built, each parallel with the last, until there were five in a row.

Apparently, the first patent on one of these timber jackknife bridges was granted in 1849 to a local contractor, Joseph Ross, who built one for the Eastern Railway at Manchester, Massachusetts shortly thereafter. The system was improved by the introduction of the center pivot swing bridge, basically the same type in use today. The new form was adopted by the railroads in the latter half of the nineteenth century, but as the bascule and lift bridges became available fewer and fewer swing spans were built.

Movable bridges may be divided into the following classes: (1) Ordinary swing spans; (2) bobtailed swing spans; (3) horizontal folding draws; (4) shear-pole draws; (5) double rotating cantilever draws; (6) retractile or pullback draws; (7) trunnion bascule bridges; (8) rolling bascule bridges; (9) jack-knife or folding bridges; (10) vertical-lift bridges; (11) gyratory lift bridges; (12) aerial ferries, transporter bridges, or transbordeurs; and (13) floating or pontoon bridges.<sup>1</sup>

The bob-tailed swing span (2) is a variation of the ordinary rotating draw formed by shortening one of the arms. The horizontal-folding draw (3) was used for short railway spans, and the girders revolve laterally ninety degrees. The shear-pole draw (4) was a special variety of swing bridge in which the pivot is located near one end of a single arm. When open, the other end of the arm is supported from the top of a two-legged shear pole, on the abutment, by rods which are attached to a pivot at its top, directly over the pivot supporting the span below. When the bridge is closed and the swinging end lifted, the arm is a simple span supported at both ends.

The double rotating cantilever draw (5) consists of two ordinary swing spans, each resting on a pivot pier and meeting at mid-channel. The pullback draw (6) is constructed with one or two spans over the entire opening and bottom chords run on two groups of rollers. [The bridge which immediately preceded the existing Scherzer overhead counterweight structure, built in 1934 over Knapps Narrows (#20001) was a pullback draw.] Some types telescope with each half of the opening spans (in a double pull-back draw) pulling back and telescoping into the approach span. The jack-knife or folding bridge (9) is a variant of swing bridge which is used only for railroads, in which, when opened, each half of the floor assumes the position of an inverted V. The vertical lift bridge (10), widely used throughout the United States but not utilized in Maryland, consists of simple spans resting on piers when closed. In most cases the weight of the lifting span is counterweighted by means of ropes, or chains, attached to the ends of the spans and the counterweights, which pass up and over sheaves on top of the towers at the end of the bridge.

The gyratory lift bridge (11), patented by Eric Swensson of Minneapolis, consists of a truss suspended by trussed hangers from trunnions bearing on a tower at each abutment. The draw is opened by revolving the main roadway trusses in an arch around the horizontal longitudinal axis marked by the trunnions. The aerial ferries or transbordeurs (12) are a cross between a bridge and a ferryboat. It consists of two towers, an overhead span high enough to clear masts of ships and a track on the span, with a car running on the tracks and, finally, a platform suspended from the ferry car. The floating or pontoon bridge (13) may be the earliest type of movable bridge. It is usually adapted for use when local conditions prevent the construction of more stable structures and when a temporary crossing must be quickly made.

Of these thirteen types, only numbers 1, 7, 8, and 10 were in frequent use in the early twentieth century. Numbers 2, 5, 12, and 13 were employed occasionally and numbers 3, 4, 6, 9, and 11 were no longer used, according to Dr. John Alexander Low Waddell, the dean of American bridge engineers, in his 1916 text, Bridge Engineering.

Regardless of its limitation, the swing bridge was the only choice available until the end of the last century. One of the first notable examples in America was designed by Wendell Bollman to cross the Mississippi River at Clinton, Iowa. This bridge was built around 1863 by the Detroit Bridge and Iron Works. With its 360-foot draw span, it was one of the largest in the country at the time. Subsequently, the Mississippi became noted for its swing bridges, all of its many low-level crossings incorporating this form. The longest is the 525-foot crossing built by the Santa Fe Railroad at Fort Madison, Iowa in 1926. Since then all movable bridges of comparable length have been vertical lifts, a far more economical choice for larger spans. The various kinds of lift bridges were evolved in the endeavor to occupy less space and waste less time.

In the early twentieth century, builders of competitive types of movable bridges, especially the bascule, disparaged the swing bridge in their advertising by emphasizing the fact that the draw span itself took up part of the channel. Indeed, the wider the bridge, the narrower the passage. Because the bridge type requires a large pivotal pier in the center of the waterway on which to rotate, it not only divides an otherwise wider channel into two smaller halves, but the pier itself often causes serious deflections of the current to either bank. Another disadvantage of the swing bridge, as an impatient motorist would attest, is that it must be swung a full ninety degrees to open sufficiently to allow even the small vessel to pass and then close a full ninety degrees back. Furthermore, a swing bridge, when open, provides no protection to land traffic, while the leaves or counterweights of bascule designs provide a barrier to traffic. In addition, the

dock front adjacent to a rotating draw is not available for business.

The promoters of the bascule bridge also touted the advantages specific to the bascule type that make it superior to the swing bridge. For one, it operates very rapidly, and with a choice of partially raising the span for the passage of vessels with small clearance or of opening it all the way up and leaving the channel unobstructed. Also, should a further track or roadway be required, another bascule can be built directly adjacent to the first, a solution obviously quite out of the question with a structure that swings.

The trend away from swing bridge construction and toward the other designs by the second quarter of the twentieth century is indicated by the following figures. In the period prior to 1924, among highway bridges, 25 vertical lift bridges, 250 bascule, and 450 swing bridges were constructed. From 1924 to 1974, 100 vertical lift bridges, 430 bascule and 250 swing bridges were completed.<sup>2</sup> Thus, vertical lift and bascule structures gained in popularity whereas other structures were constructed much less often. Currently, ninety-five percent of the total movable span bridges in the United States are swing, bascule, and vertical lift structures. There are no vertical lift bridges on the road system in Maryland.

The type of movable span bridge found most often in Maryland is the bascule bridge. In its most primitive stage, this type, the earliest of all movable bridges, was used to cross moats, or, in reverse, to deny any enemy access to a moated castle or fort by the simple device of withdrawing the span. These medieval bascules, with crude cables and no counterweights, were far removed from the technologically advanced modern bascule design. The forerunner of the modern type was developed in Europe during the first half of the nineteenth century. However, the real progenitor of the genre appeared in 1893 with the construction of Chicago's Van Buren Street Bridge, a rolling bascule, and in London's Tower Bridge, a roller-bearing trunnion bascule.

Bascule bridges may be single or double leaf, the single usually being used for short spans and the double for long ones. The most obvious advantage of the double leaf is that the two smaller leaves can be raised more quickly than a single larger one, and require smaller counterweights and moving parts. The cable lift bascule constitutes the earliest and most primitive of the bascules and has been largely abandoned in favor of the more modern and costly types.

Modern bascules are comprised of two classes: (1) the trunnion type; and (2) the rolling lift type. In the trunnion type the center of rotation remains fixed or nearly so and is at or close to the center of gravity of the rotating part. This is a

highly desirable feature where yielding foundations are unavoidable. In the rolling lift type the center of rotation continually changes and the center of gravity of the rotating part moves in a horizontal line, thereby shifting the point of application of the load on the pier, which is a faulty feature, unless the pier is founded on rock. In the roller bearing type, a variant of the trunnion type, the center of rotation remains fixed and coincides with the center of gravity of the moving mass. The trunnion is eliminated and the load is carried by a segmental circular bearing on rollers arranged in a circular track. In this way the load can be distributed over a greater area, thereby reducing the unit bearing stress; at the same time the frictional resistance to rotation is decreased.

The first modern bascule bridge to enjoy acceptance was the so-called rolling lift bascule, the Scherzer and the Rall being the two best-known variations. After the success of the Van Buren Street bascule, the Scherzer rolling lift bridge became increasingly popular with the railroads, especially in and around Chicago. The Rall type, manufactured by the Strobel Steel Construction Company, was never widely used.

The most common recent types of bascule are the simple trunnion or Chicago type, introduced about 1899 and named after the city that pioneered it with the Clybourne Avenue Bridge, and the multiple trunnion or Strauss type, named after the inventor J. B. Strauss. In the Chicago type, the whole weight of the leaf and its counterweight is borne by the trunnions located at the center of gravity of the entire mass. The most popular system by far was Strauss's bridge, either of the overhead-counterweight or heel-trunnion variety. Other varieties of trunnion bridges are the Page, Chicago City, Brown, and Waddell & Harrington types.

The early decades of the twentieth century were dominated by patented designs--Strauss, Scherzer and others--fabricated by numerous shops, many of which are no longer in existence. Designs were furnished by the patentee to fit a substructure designed for the site. Between 1873 and 1924, for example, 78 patents were issued for movable span designs and mechanisms. The major patenees were T. E. Brown, J. P. Cowing, C. L. Keller, J. W. Page, T. Rall, W. and A. Scherzer III, J. B. Strauss, J. A. L. and M. Waddell and B. L. Worden. Both Strauss and Scherzer received patents that had counterweights either above or below deck level, and were used for both railroad and highway service. In addition to the patented designs, custom designs were prepared by a limited number of consulting engineers.

Patented designs and custom designs were produced in this period, each having its place depending on the desire of the owners and on the adaptability of the patented design to special requirements and unusual site conditions. Certain locations warranted monumental structures that in general were custom

designed for the site. Elaborate decorative treatment was included in many of these.

By the 1940's patented designs were mostly in the public domain. Thus companies that had primarily promoted and used their own designs in the early decades of the twentieth century utilized many designs in the later decades which were no longer patented. Waddell and Harrington, for example, patented a bascule design (#952,485) in March 1910. By the time the successor firm, Waddell and Hardesty, submitted designs for Bridges 17006 and 2053 to Maryland State Highway Administration in the late 1940's and early 1950's, the movable span mechanisms utilized were no longer covered by patents.

In the period from 1941 to 1956 World War II and the post-war expansion occurred. Little civilian construction was done during the war years but the post-war boom in population was accompanied by a decline in dependence on rail travel and a substantial increase in automotive travel. The increases in vehicular travel necessitated widening of existing primary highways, many of which required replacement of older inadequate movable bridges with new larger structures. New four-lane and six-lane structures were common. Pressure to replace movable span with high level bridges was beginning to be felt, as motorists did not want to wait for movable bridges to be opened. This trend was further accelerated with the shift of focus and funds in the late 1950's to the building of the interstate system, which had few movable span bridges.

The general economic health of the railroads began its decline in this era and the new movable-railroad bridges were generally built only as a result of Federal aid for river improvements like channel widening or other subsidized construction. Patented designs faded from popularity in this period because of expiration of the patents, death of the patent holders and increasing sophistication on the part of the owners for structures designed to their particular requirements.

#### TYPES OF MOVABLE SPAN BRIDGES IN MARYLAND

I. **SWING BRIDGES.** These bridges consist of two-span trusses or girders which rotate horizontally. The spans are usually, but not necessarily, equal. When open, the swing spans are cantilevered from the pivot (center) pier; when closed, the spans are supported at the pivot pier and at two rest (outer) piers or abutments. In the closed condition, wedges are usually driven under the outer ends of the bridge to lift them, thereby providing a positive reaction sufficient to offset any possible negative reaction from live load and impact. This design feature prevents uplift and hammering of the bridge ends under live conditions. Swing spans are subdivided into:

A. Center-Bearing. This type of swing span carries the entire load of the bridge on a central pivot (usually metal disks). Balance wheels are placed on a circular track around the outer edges of the pivot pier to prevent tipping. When the span is closed, wedges similar to those at the rest piers are driven under each truss or girder at the center pier. This relieves the center bearing from carrying any live load. However, these wedges do not raise the span at the pivot pier, but are merely driven tight. Maryland currently has four swing spans on the road system and these are center-bearing structures.

Bridge 2081 (MD 436 over Weems Creek), built in 1929, is composed of thirteen 20-foot steel girder spans and two 48-foot pony steel truss swing spans. It was built under contract to the Commissioners of Anne Arundel County.

Bridge 4008 (MD 231 over Patuxent River), designed by the J. E. Greiner Company in 1950, has a through steel girder swing span.

Bridge 20023 (MD 331 over Choptank River), constructed in 1932 and also designed by the J.E. Greiner Company, is composed of two 215-foot through steel trusses, eight 24-foot concrete slab spans and a 219-foot swing span. It is known as the Dover Bridge.

B. Rim-Bearing. This type of swing span transmits all loads to the pivot pier, both dead and live, through a circular girder or drum to bevelled rollers. The rollers move on a circular track situated inside the periphery of the pier. The rollers are aligned and spaced on the track by concrete spacer rings. This type of swing span bridge also has a central pivot bearing which carries part of the load and is connected to the rollers by radial roller shafts. On both types of swing bridges, the motive power is usually supplied by an electric motor, although gasoline engines or manual power may also be used. The bridge is rotated by a circular rack and pinion arrangement.

II. BASCULE BRIDGES. In this type of bridge the leaf (movable portion of the decks) lifts up by rotating vertically about a horizontal trunnion (axle). This trunnion is positioned at the dead load centroid. Bascule bridges may be either single or double-leafed. In the former case, the entire span lifts about one end. A double-leafed bascule has a center joint and half of the span rotates about each end. It is obvious that a counterweight is necessary to hold the raised leaf in position. In older bridges, the counterweight is overhead, while in the more modern bridge, the counterweight is often placed below deck and lowers into a pit as the bridge is opened. When the bridge is closed, a forward bearing

support located in front of the trunnion is engaged and takes the live load reaction. On double-lead bascule bridges, a tail-lock behind the trunnion and a shear lock at the junction of the two leaves are also engaged to stiffen the deck. There are several varieties of bascule bridges, but the most common are:

A. Chicago (or simple) trunnion. This variety of bascule bridge consists of a forward lead and a rear counterweight arm which rotates about the trunnion. The trunnion bearings, in turn, are supported on the fixed portion of the bridge such as a trunnion girder, steel columns or on the pier itself.

Bridge 23002, the Snow Hill Bridge carries MD 12 over the Pocomoke River. Designed by the J.E. Greiner Company in 1932, it is composed of single 47-foot steel girder and a 45-foot single leaf bascule.

Bridge B147 carries Penninsula Expressway over Bear Creek. Although the Wilson T. Ballard Company designed the approach spans and roadway in 1958, the Diver Brothers Company may have designed the bascule span in 1960.

The Pennington Avenue Bridge (BC5217) over Curtis Creek was designed in 1976 and is also a trunnion. It was designed by Zollman Associates.

Bridge 2045 over Stony Creek was built in 1947. Is composed of fifteen 54-foot steel beam spans and a 75-foot double leaf bascule span.

Bridge 2053 carrying MD 181 over Spa Creek, was designed in 1946 by Waddell and Hardesty, a New York firm, and is composed of fourteen 55-foot steelbeam spans and a 62-foot double leaf bascule.

Bridge 17006, which formerly carried US 50/301 over Kent Narrows, but currently carries MD 18, was built by the same firm in 1952. It replaced an overhead counterweight bridge. Neither of these latter two bridges utilized a bascule design which was patented according to Mr. Richard W.Christie of Hardesty and Hanover, the successor of Waddell and Hardesty, as the heyday of patents had passed and all designs were more or less in the public domain.<sup>3</sup>

Bridge 22009 carries MD 991 over the Wicomico River and is composed of one 40-foot double leaf bascule. It was built in 1928 and carries Main Street over the Wicomico River in Salisbury, Maryland.

Bridge 22028, designed by the J.E. Greiner Company in 1962, carries US 50 over the Wicomico River. It is composed of a 19-foot and 36-foot steel beam spans and a 66-foot single leaf

bascule.

B. Rolling Lift (Scherzer) Bridge. This type is commonly known as a bascule, but the term "rolling lift" is more correct, according to bridge historian Otis Ellis Hovey. This is a bridge type whose complete superstructure, forward leaf or span itself, rear arm, and counterweight rolls back from the channel. This is accomplished with a quadrant or segmental girder whose center of rotation is at the centroid of the bascule. The girder rims roll along a toothed track and in so doing lifts and withdraws the leaf. A horizontal retraction of a cable or rack attached to the centroid of the bascule leaf produces this motion.

Seventeen bascule spans were built in Maryland prior to 1960 and are still open to traffic. At least seven are Scherzer designs and five were designed by the J.E. Greiner Company.

The oldest is bridge 23004, designed in 1920, which carries MD 675 over the Pocomoke River. It is a double leaf bascule bridge composed of four 36-foot concrete girder spans, two 13-foot girder spans and a 65-foot double leaf bascule span.

Bridge 9001, which carries MD 14 over Marshyhope Creek, was designed by the J.E. Greiner Company in 1931. It is composed of eight 35-foot concrete girder spans and a 60-foot double leaf bascule. Not opened since the 1970's, it is not possible to operate it mechanically.

Bridge 9008, carrying MD 795 over CambridgeCreek, was designed in 1938 by the Henry G. Perring Company, a Baltimore firm. It is composed of six 35-foot concrete girder spans and a 64-foot double leaf bascule.

Bridge 20001, carrying MD 33 over Knapps Narrows, was built in 1934 and is composed of two 15-foot and one 20-foot timber spans and a 50-foot single leaf bascule. It was built to replace a pullback draw bridge, the only one known to have ever existed in Maryland.

Bridge 14027, designed in 1930, is made up of thirty-four 35-foot concrete girder spans, four 33-foot concrete girder spans and a 89-foot double leaf bascule. It carries MD 213 over the Chester River in Chestertown. The entire superstructure was replaced in the late 1980's.

Bridge 23007, carrying US 50 over Sinepuxent Bay, has sixty-eight 28-foot concrete slab spans, a 77-foot steel beam span and a 70-foot double leaf bascule. It was built in 1942.

The final structure, B79, which carries Wise Road over Bear Creek, was likewise designed by the J.E. Greiner Company in

1943.

C. Rall Lift. This is a variation of the rolling lift bascule bridge in which the segmental girder is replaced by a large roller at the bascule's centroid. To open the bridge, the roller moves backward on a horizontal track. The only Rall structure known at this time to have been constructed in Maryland is bridge BC5210 which carries MD 2 (Hanover Street) over the Middle Branch of the Patapsco River. It was constructed in 1916 to plans developed by the J.E. Greiner Company, and is the oldest movable span structure remaining on Maryland highways.

D. Strauss Bascule Bridge. There have been more bascule spans built from the various Strauss designs than from those of any other single type of bascule according to Otis Ellis Hovey in his 1926 text on movable span bridges.\* The Strauss class of bascule bridge employs four trunnions connecting the sides of a parallelogram-shaped panel formed by the lift span and a fixed triangular rear panel. The principle trunnion about which the movable span rotates is at the heel of the truss. This parallelogram, in some form, is used in practically all of the Strauss bascule designs.

Strauss designs are of three general types: (1) the vertical overhead counterweight type; (2) the underneath counterweight type, (3) the heel trunnion type. With the underneath counterweight type the counterweight is lowered along a vertical axis below the road level. It may be cored out to clear the floor framing when a compact arrangement is necessary. When two leaves are used, the front shear locks and rear anchorages must be provided. The dead load on the trunnions is constant and the break in the floor is in front of the trunnions.

The only Strauss movable span which existed in the late twentieth century in Maryland was bridge 2070 carrying MD. 450 over the Severn River. Constructed in 1924, it is composed of approximately twenty 70-foot steel arches and a 95-foot bascule span. In the late 1970's the four spans at the eastern end of the bridge were replaced with four steel beam spans. It is an underneath counterweight type in which the counterweight is lowered along a vertical axis below the road level. This bridge was removed in 1994.

In 1995 there were twenty-two movable span bridges in Maryland, reduced from twenty-four in 1992 with the removal of Bridge No. 9014 in 1992 and Bridge No. 2070 in 1994. There are two modern replacement structures: Bridge No. 20018 (MD 370 over Miles River), and Bridge No. 14006 ((MD 213 over Sassafras River). Four other structures are also quite recent: Bridge No. 16173 (I-495 over the Potomac River) was built in 1961, Bridge No. 22028 (US 50 over

the Wicoimico River) was built in 1962, Bridge No. B147 (Penninsula Expressway over Bear Creek) was built in 1960 and Bridge No. 5217 (Pennington Avenue over Curtis Creek) was designed by Zollman Associates in 1976. These structures have little historical interest.

## FOOTNOTES

<sup>1</sup> Waddell, J. A. L. Bridge Engineering, Volume I (New York: John Wiley and Sons, Inc. 1916, p. 664

<sup>2</sup> Hardesty, Egbert, Henry W. Fischer, Richard W, Christie, "Fifty-Year History of Movable Bridge Construction-Part I", Journal of the Construction Division, ASCE, September, 1975, p. 512.

<sup>3</sup> Personal communication with the author.

<sup>4</sup> Hovey, Otis Ellis, Movable Bridges, Volumes I & II, John Wiley & Sons, Inc., New York, 1926, P. 116.

## SOURCES

Hardesty, Egbert, Henry W. Fischer, Richard W, Christie, "Fifty-Year History of Movable Bridge Construction-Part I", and "Part II", Journal of the Construction Division, ASCE, September, 1975, pp. 511-543.

Hool, George A. and W.S. Kinne, Movable and Long-Span Bridges, McGraw-Hill Book Company, Inc., New York, N.Y., 1943.

Hovey, Otis Ellis, Movable Bridges, Volumes I & II, John Wiley & Sons, Inc., New York, 1926.

Plowden, David. Bridges, the Spans of North America, W.W. Norton and Company, New York, 1974, pp. 186-188.

Waddell, J.A.L., Bridge Engineering, Volumes I & II, John Wiley and Sons, Inc., New York, New York, 1916, pp. 663-746.

D-584

## MOVABLE SPAN BRIDGES IN MARYLAND revised 1/19/95

<u>Name</u>	<u>No.</u>	<u>Route</u>	<u>Crossing</u>	<u>Type</u>	<u>Date</u>
Stony Creek	2045	MD 173	Stony Creek	DLB	1947,86
Spa Creek	2053	MD 181	Spa Creek	DLB	1946
Ridgely Ave	2081	MD 436	Weems Creek	PST Swing	1929,82
Benedict	4008	MD 231	Patuxent R	TSG Swing	1950
	9001	MD 14	Marshyhope Cr	DLB (NO)	1931
Maryland Ave	9008	MD 342	Cambridge Cr	DLB	1938
Sassafras	14006	US 213	Sassafras R	SLB	1987
Chestertown	14027	US 213	Chester R	DLB	1930,90
Woodrow Wilson	16173	I-495	Potomac R	DLB	1961,84
Kent Narrows	17006	MD 18	Kent River	DLB	1952
Tilghman	20001	MD 33	Knapps Narrows	SLB(OC)	1934,71
Miles River	20018	MD 370	Miles R	SLB	1984
Dover Bridge	20023	MD 331	Choptank R	TST Swing	1932
Main Street	22009	MD 991	Wicomico R	DLB	1928,81
US 50-Salisbury	22028	US 50	Wicomico R	SLB	1962
Snow Hill	23002	MD 12	Pocomoke R	SLB	1932
Pocomoke	23004	MD 675	Pocomoke R	DLB	1920,89
Ocean City	23007	US 50	Sinepuxent Bay	DLB	1941,80
	B79	Wise Rd	Bear Creek	DLB	1943
	BC5217	Pennington	Curtis Creek	DLB	1976
	B147	Peninsula	Bear Creek	DLB	1958
Hanover St	BC5210	MD 2	Patapsco(Mid.Br)	DLB	1916

DBL=Double Leaf Bascule

SLB=Single Leaf Bascule

PST Swing=Pony Steel Truss Swing

TSG Swing=Through Steel Girder Swing

TST Swing=Through Steel Truss Swing

OC= Overhead Counterweight and NO= Not Operable

## GENERAL BRIDGE SIGNIFICANCE

The significance of bridges in Maryland is a difficult and subtle thing to gauge. The Modified significance criteria of the National Register, which are the standard for these judgements in Maryland, as in most states, must be broadly applied to allow for most of these structures. In particular the 50 year rule which specifies a minimum age for structures can be waived, and is more commonly done so for engineering structures than for others. Questions of uniqueness and typicality, exemplary types, etc., must set aside for now, because they presuppose a wider knowledge of the entire resources than is presently available. Indeed, this survey is an initial step toward understanding the extent to which Maryland's bridges are part of her cultural resources. Aesthetic considerations may have to be side-stepped entirely, for such structures as these are generally considered mundane and ordinary at best, and sometimes a negative landscape feature, by the layman. It does take a specialized aesthetic sense to appreciate such structures on visual grounds, but a case for visual significance can be made. The remaining criteria are those of historical associations. The relative youth of most of these structures precludes a strong likelihood of participation to events and lives of import. The best generalization can be made for most bridges is that they are built on site of early crossings, developing from fords and ferries through covered bridges and wooden trusses to their present state. This significance inheres in the site, however, and in most cases would not be diminished by the adsense of the present structure.

These criteria may also be addressed positively. The primary significance of these bridges, those which were built between the two World Wars, consists in their association with rapidly changing modes and trends in transportation in America during the period. The earliest of them saw the appearance of the automobile and its rise as the preëminent means of getting Americans from place to place. Roads were being improved for increased speeds and capacity, and bridges, as potential weak links on the system, became particularly important. The technology for producing them was not new, and would not change significantly during the period. Accordingly, great numbers of easily, quickly and relatively cheaply built concrete slab, beam and arch bridges were built to span the samll crossings, or were multiplied to cover longer crossings where height was no problem.

Truss bridges with major structural members of compound beams, of either the Warren or Pratt types, while more expensive and considered more intrusive on the landscape, were built to span the larger gaps,

With an aesthetic which allowed concrete slab bridges to have classical balustrades, or the application of a jazz-age concrete relief; with the considerable variety possible in the construction of medium sized metal trusses; and with the lack of nationwide standards for highway bridge design, the resulting body of structures displays considerable variety. The sameness of appearance of currently produced highway bridges leads one to believe this variety will not reappear. For that reason alone it is wise to keep watch over our existing bridges. Regardless of ones taste and aesthetic preference, one must be admitted that these older bridges add their variety and visual interest to the environment as a whole, and that it is often the case that their replacement by a standard highway bridge results in a visual hole in the landscape.

In situations requiring decisions of potential effect on these structures, they should receive some consideration. As the recording and subsequent understanding of Maryland's Cultural resources grows, they will be recognized as a significant part of that heritage.

It should be noted that two non-negligible classes of structure have been omitted from this set. The first is the huge number of concrete slab or beam bridges of an average of twenty feet or less in length. These are so nearly ubiquitous and of such minor visual impact (they are often easy to drive across without noticing) that they were not inventoried. They are considered in the general recommendations section of the final report of this survey, however.


The second category is that of the "great" bridges, the huge steel crossings of the major waterways. While they are awesome and aesthetically appealing, they are not included in this inventory because they do not share the problems of their more modest counterparts. They do not lack for recognition, they have not been technologically outmoded, and are in no danger of disappearing through replacement. In a sense, they are not as rare; hundreds of

these great bridges are known nationally, and there is little doubt as to the position of any one bridge within national spectrum. There seems little point in including them with the larger inventory of bridges. From an arbitrary point of view, their dates are outside the 1935 limit which we set for the consideration of bridges. We have departed from that limit on occasion, but will not in this case. These bridges, too, will be considered in the final report.

Moveable bridges deserve a special note regarding their significance. They are rare, and all but the most recent of them have been listed by this survey by virtue of that fact alone. They are, by their nature as intermittent impediments to the smooth flow of traffic, threatened. We rarely tolerate disruptions to what we perceive as our progress. This has been demonstrated recently by the replacement of the drawbridge at Denton, on one of the major routes to the Atlantic Coast from the rest of Maryland.


However much we are inconvenienced by them, we must admit that moveable bridges contribute a share of interest to the landscape. As with significance judgements in general, we here enter a realm which is governed by taste and opinion. Some of us might not enjoy being forced to sit back for a while to look at the surroundings which we would otherwise totally ignore, especially if the engine is in danger of boiling over. But there are those who are fascinated by the slow rise of a great chunk of roadway, moved by quit, often invisible machinery; who are amused by the tip of the mast which skims the top of the temporary wall; or who reflect on the nobility inherent in a river and the fact that we have not subdued every waterway with our autos, while knowing that we can if we want to.

D-584

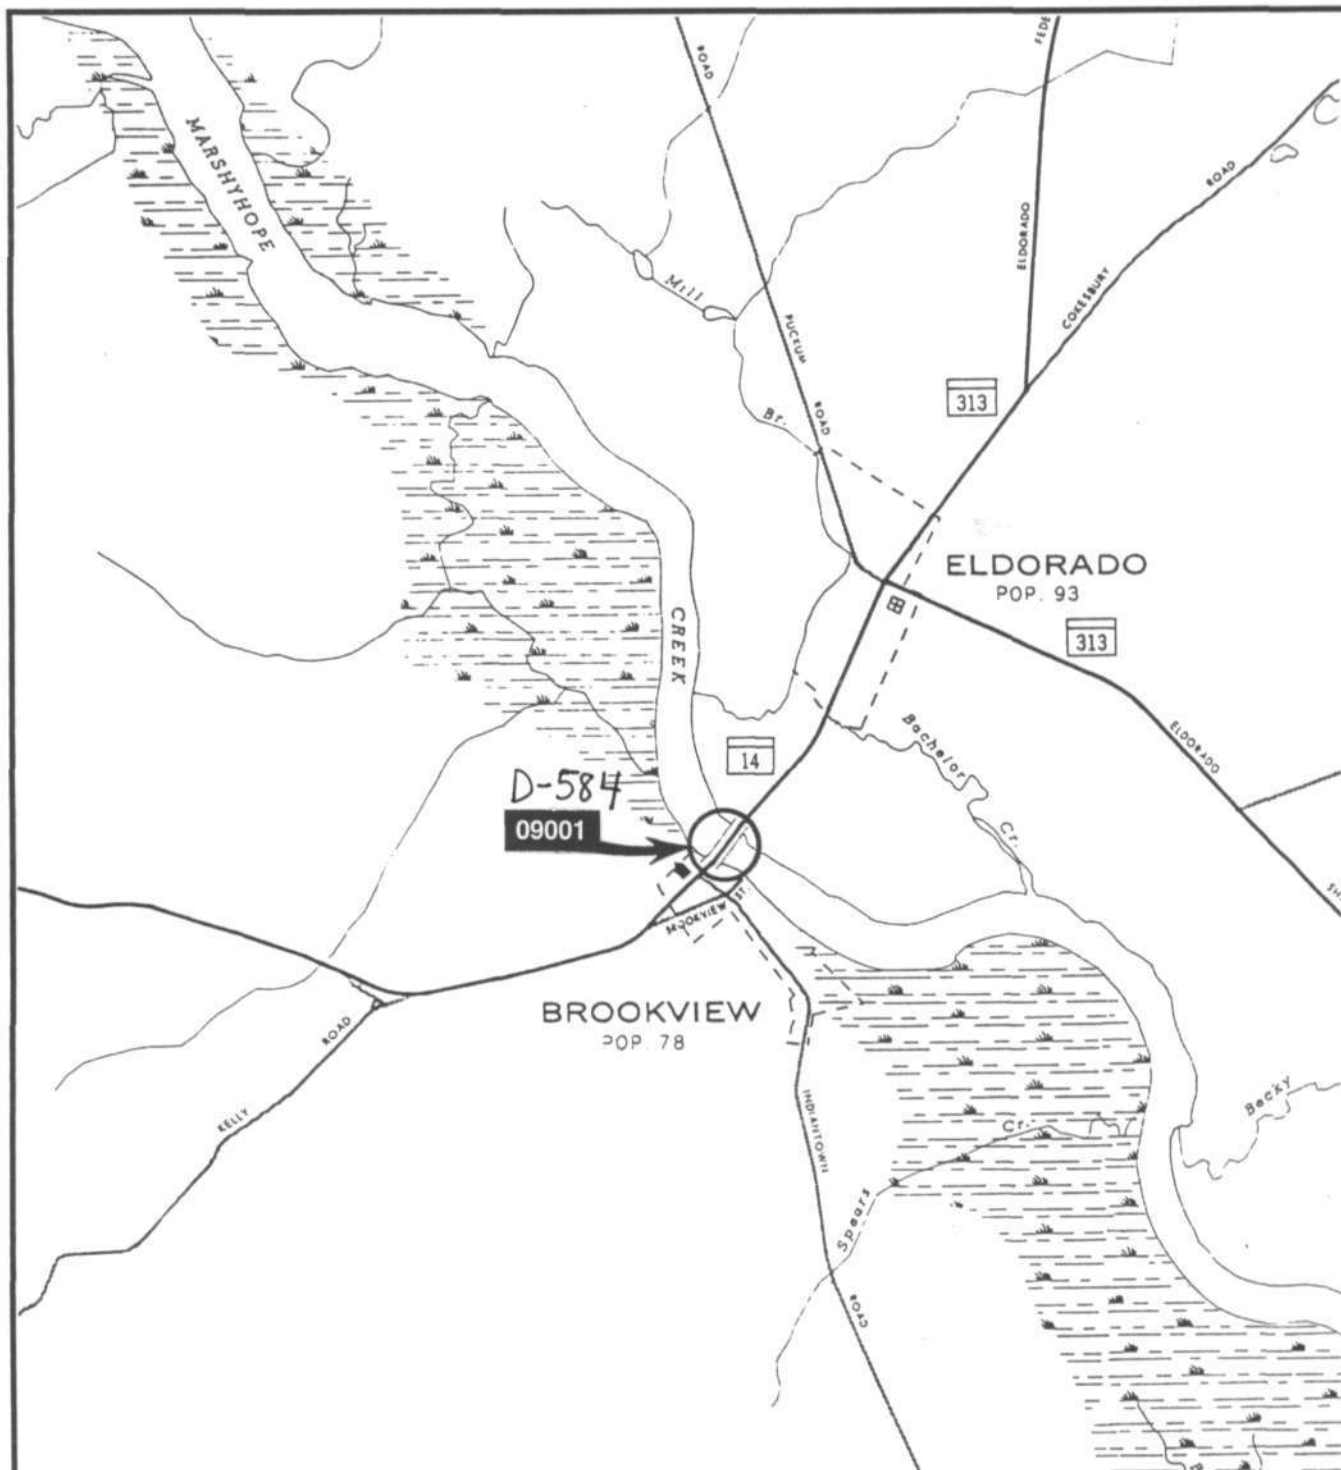


**Dorchester County - Bridge Number 09001**  
 MD 14 over Marshyhope Creek (Cambridge Bridge)  
*(Determined National Register eligible by Interagency Review Committee)*

Scale 0 1000 2000 feet  
 0 0.5 kilometer

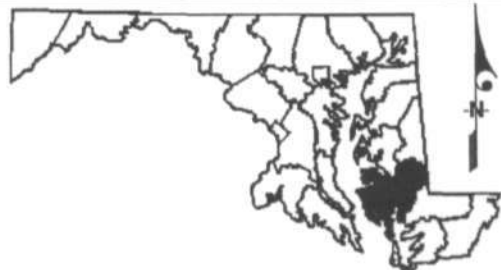


D-584

NOT TO SCALE

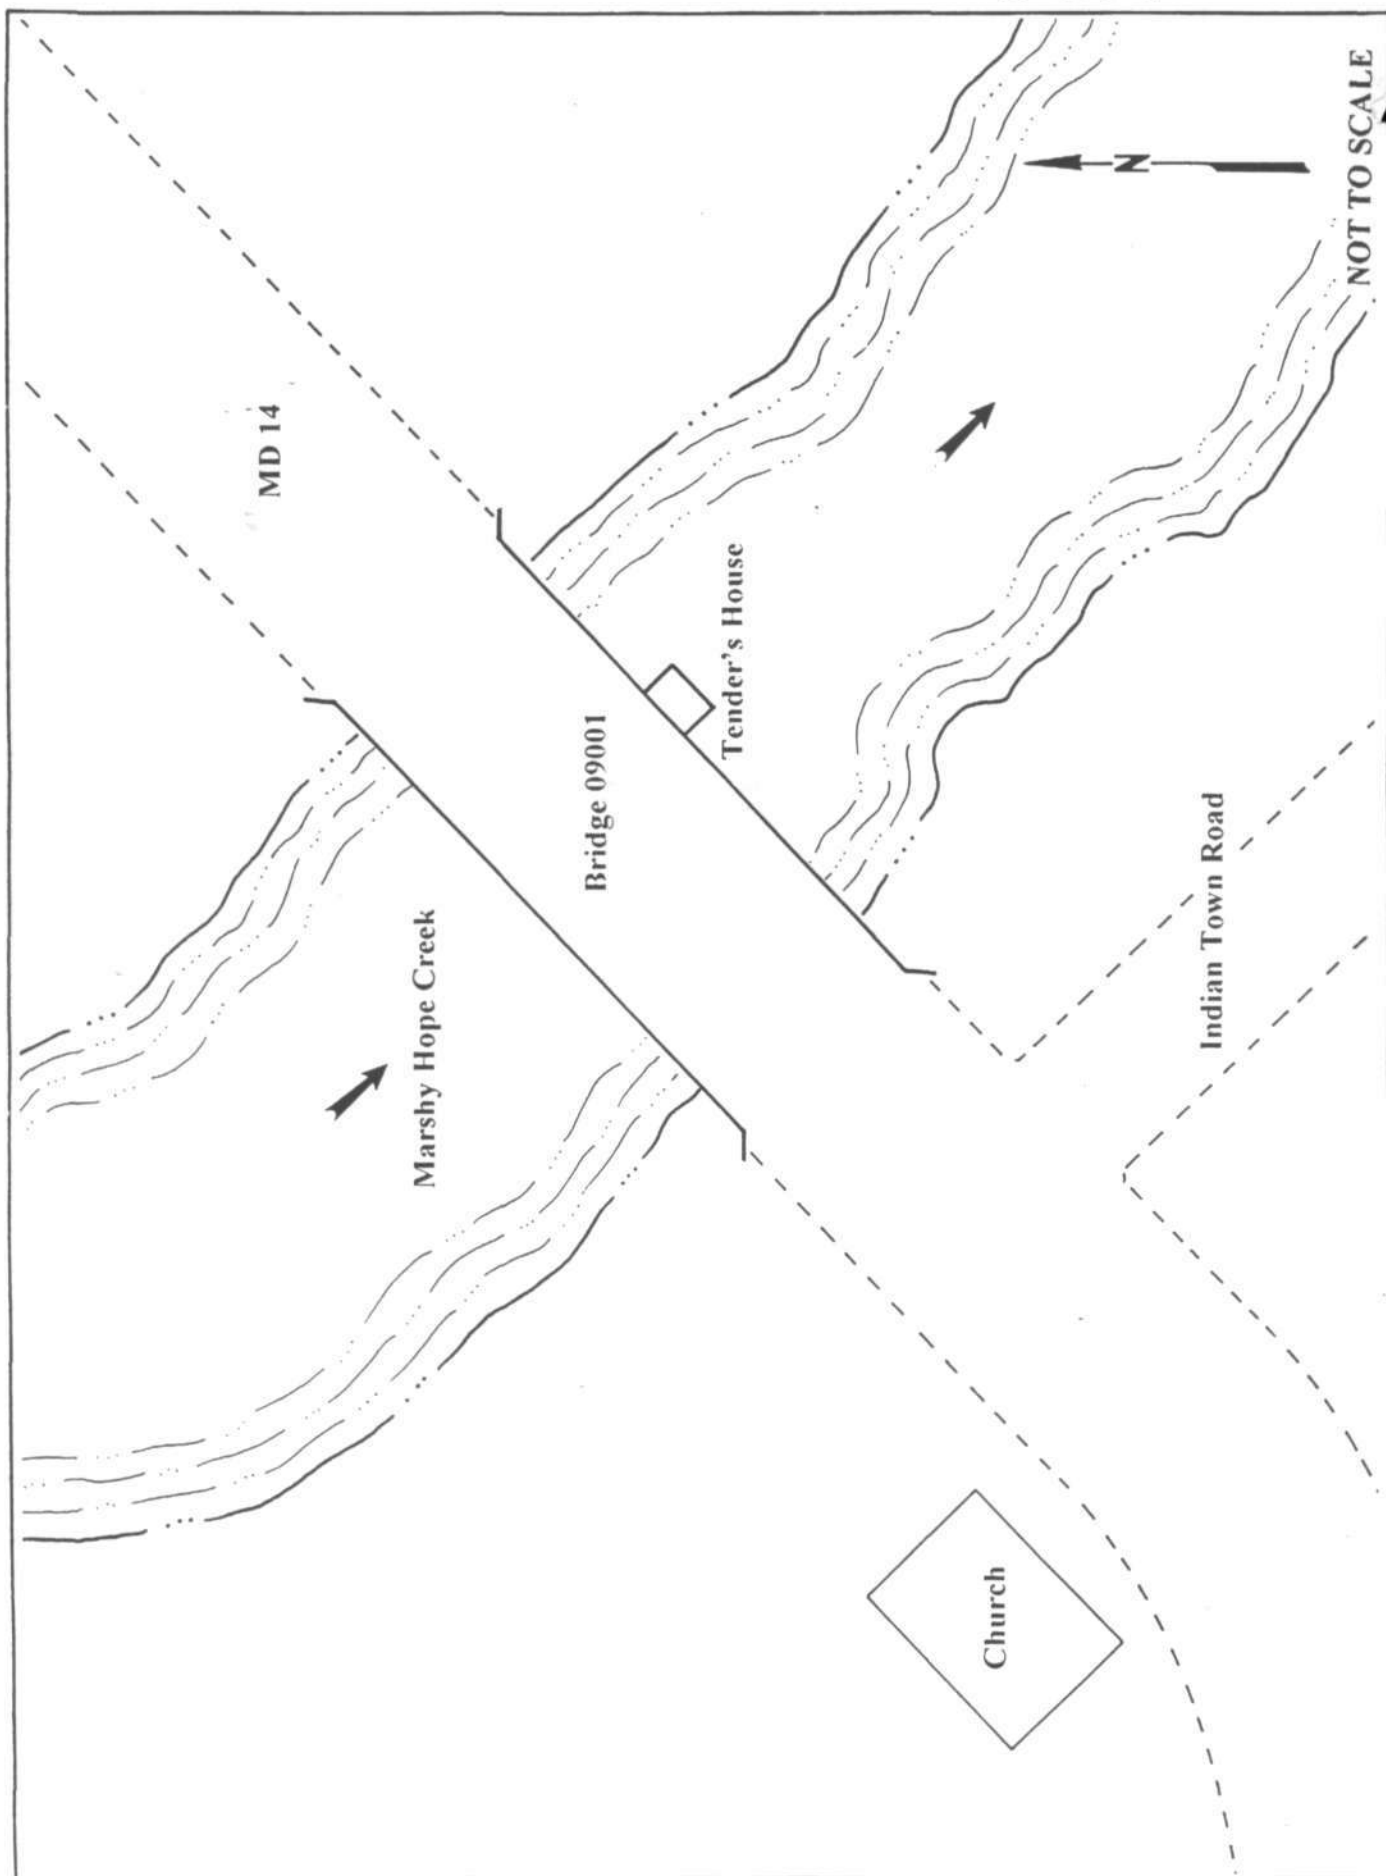

D-584

8942 (SHARPTOWN)  
5861 II SW

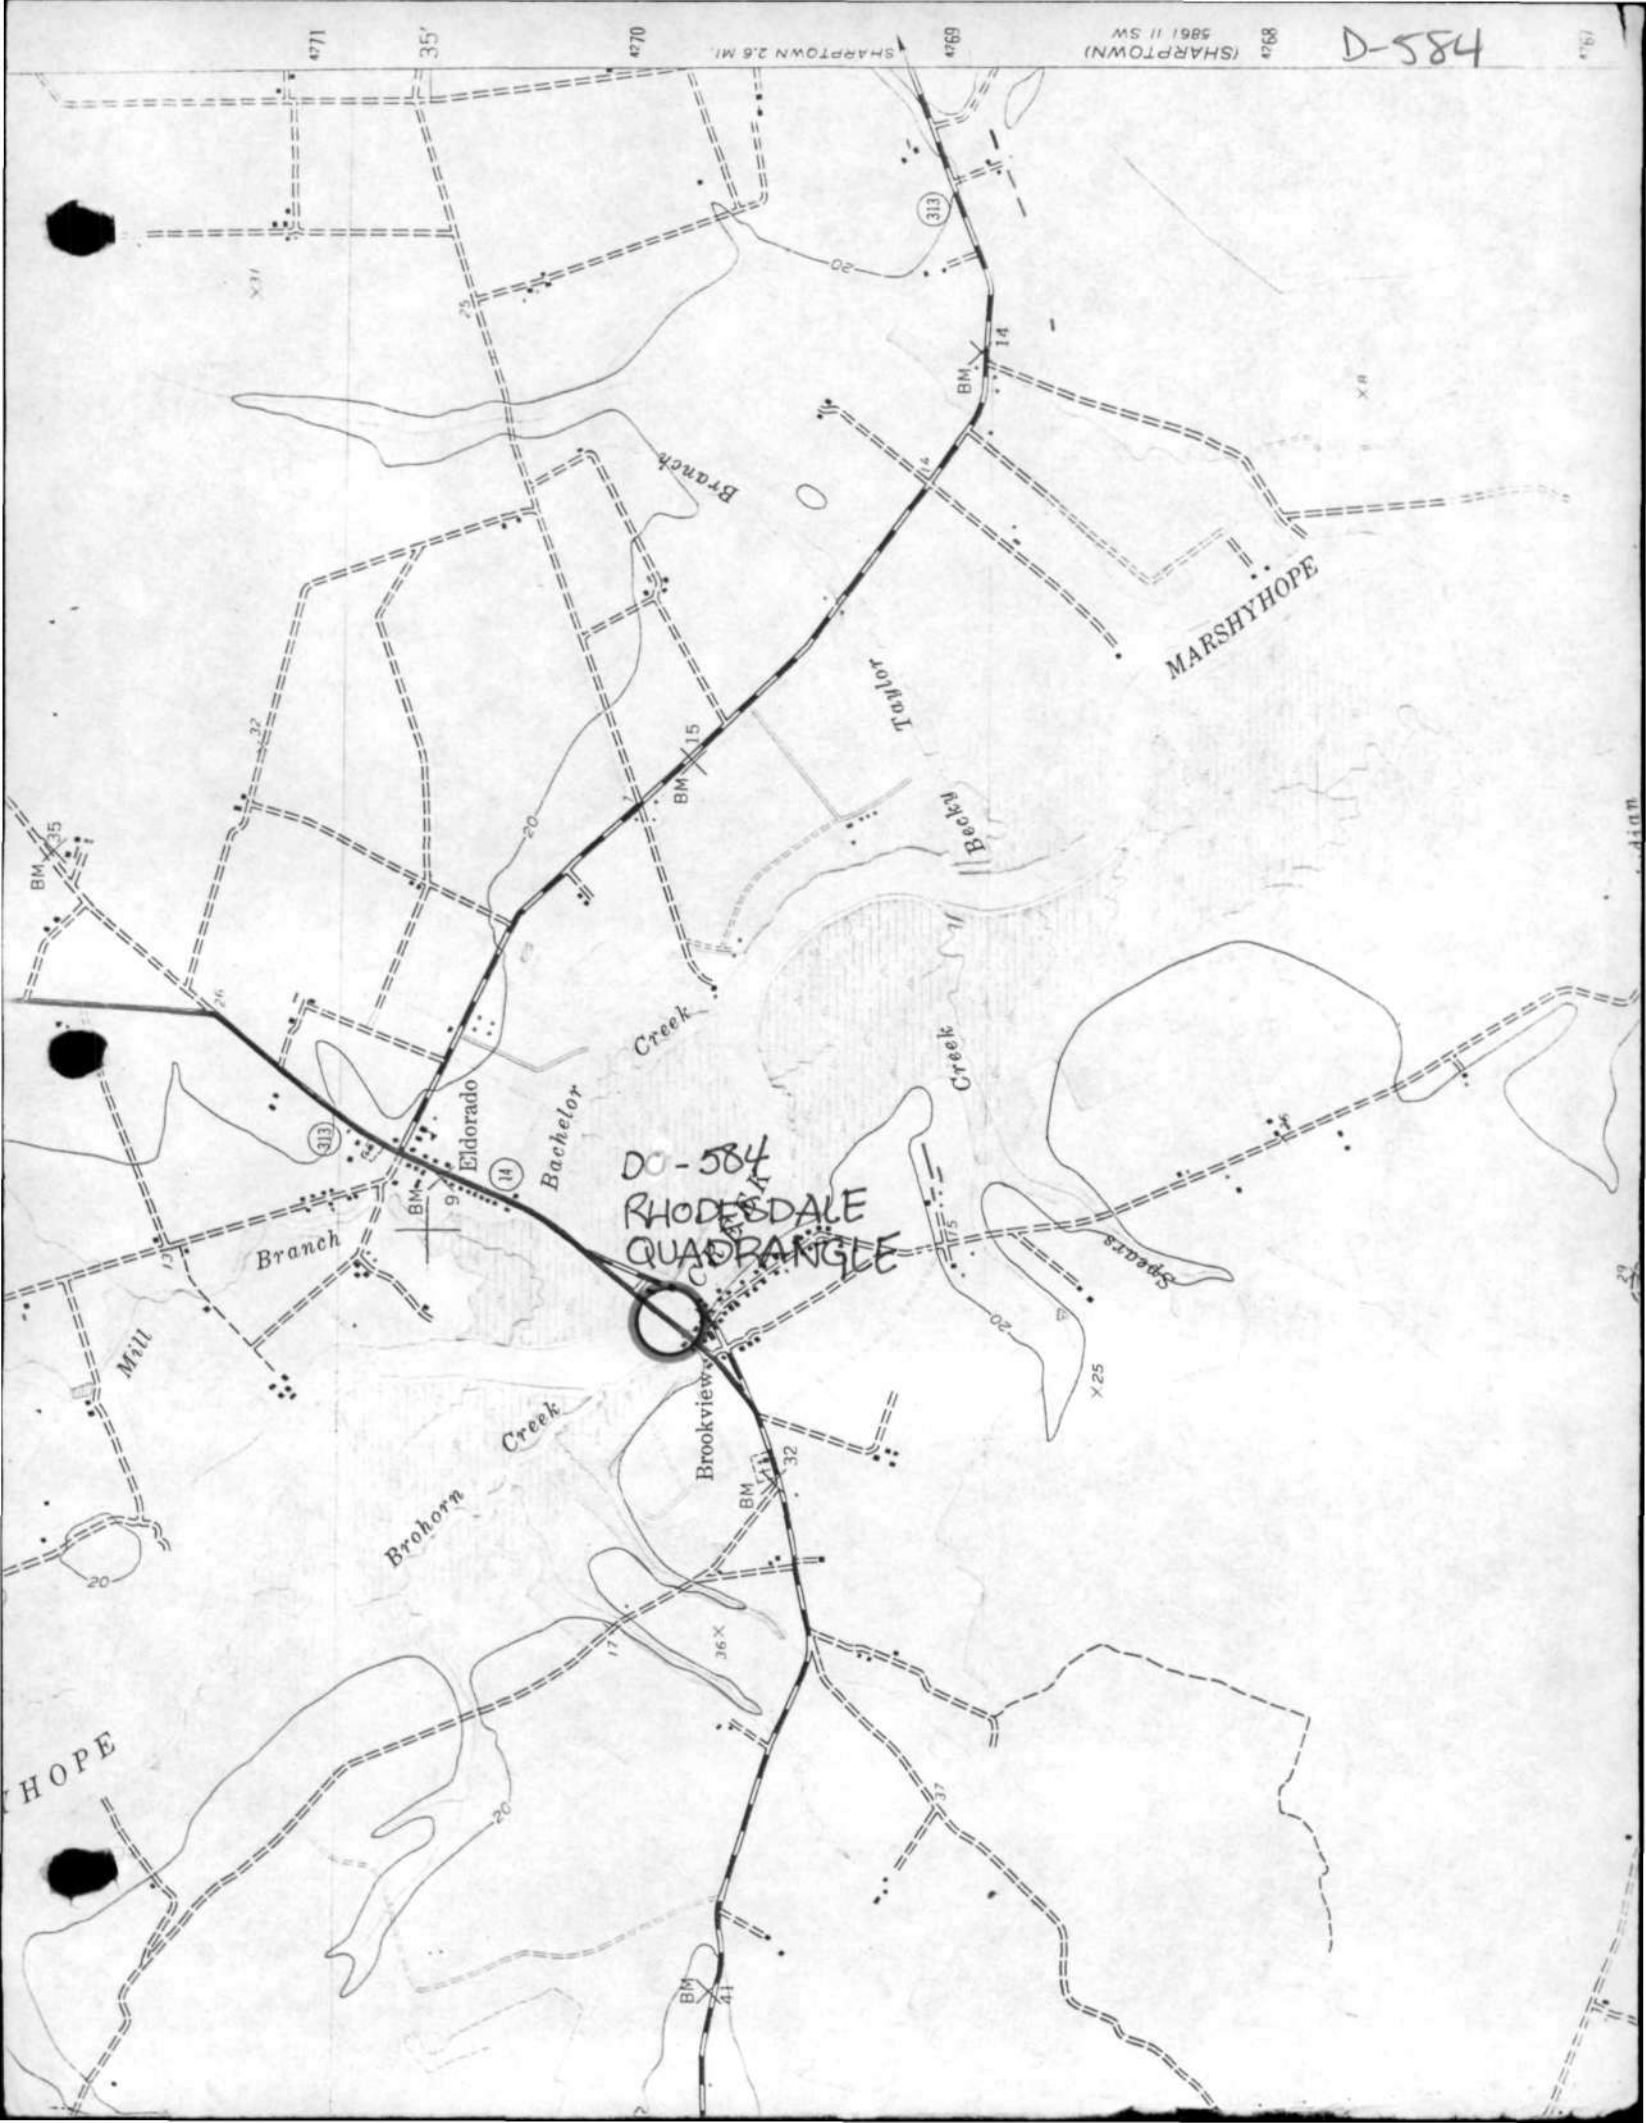

Phodesdale



D-584

Brookview Bridge (09001)

Dorchester County, Maryland


Julie Abell

12/94

Maryland State Highway Administration

Southeast elevation

1 of 6

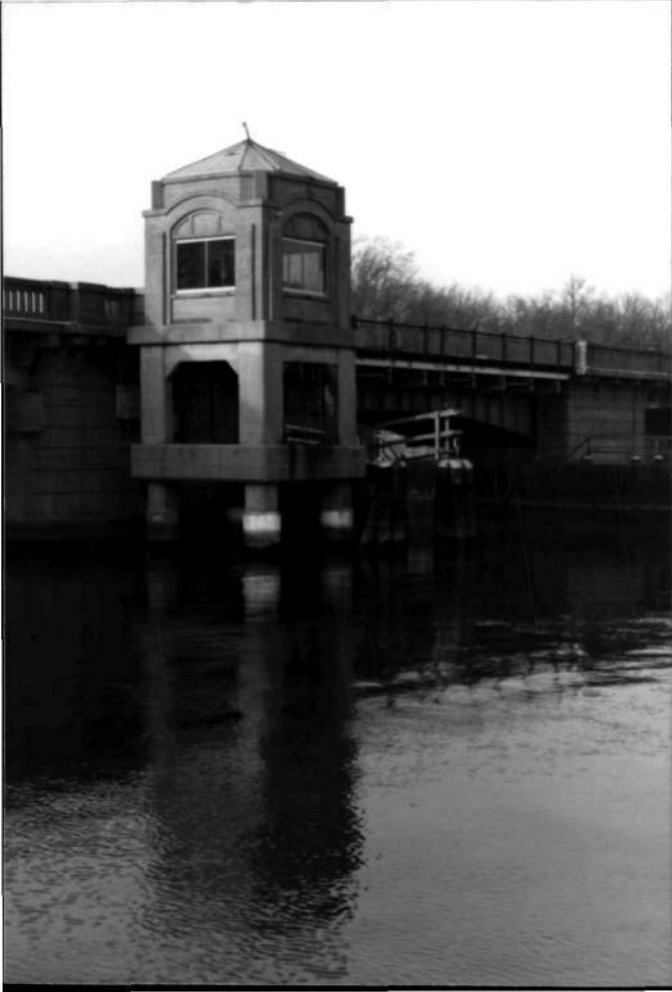

D-554

Brookview Bridge (09001)

Dorchester County, Maryland

Julie Abell

12/94

Maryland State Highway

Administration

Southeast elevation, detail

2 of 6



D-584

Brookview Bridge (09001)

Dorchester County, Maryland

Julie Abell

12/94

Maryland State Highway Administration

Northwest elevation

3 of 6



D-584

Brookview Bridge (09001)

Dorchester County, Maryland

Julie Abell

12/94

Maryland State Highway  
Administration

Approach looking southwest

4 of 6



D-584

Brookview Bridge (09001)

Dorchester County, Maryland

Julie Abell

12/94

Maryland State Highway  
Administration

Approach looking northeast

5 of 6



D-584

Brookview Bridge (09001)

Dorchester County, Maryland

Julie Abell

12/94

Maryland State Highway Administration

Roadway and bridge tender's house

6 of 6